

GBeacon

GB2111 Datasheet

GLOWBIRD

1. Description

GBeacon GB2111 is a super long battery life Bluetooth 5.1 Low Energy smart beacon, it simultaneously supports iBeacon, Eddystone (e.g. URL, UID, TLM), AltBeacon for broadcasting and provides the ability to advertise up to 10 slots of advertising frames.

With the iOS & Android GBeacon SDK, the developers can take advantage of the flexibility of the SDK and focus on their own application, such as Broadcast, Proximity Marketing, Digital Signage, Indoor Location, Asset Tracking, Vehicle Tracking, etc. Meanwhile, GBeacon SDK compiled app is available to download from both the iOS and Android platform (search 'GBeacon' to download).



2. Features

- Bluetooth 5.1 Compliant
- Pre-programmed with Glowbird Standard Beacon Firmware
- Up to 10 slots of Advertising Frames
- Portable Smart Beacon with up to 10 Years Battery Life (by Default Settings)
- Configurable by Free GBeacon Mobile App and SDK
- Customizable Color, Logo, Hardware, Software
- Up to 400m in open area

3. Functional Specifications

| Item | Description |
|----------------------------|---|
| Advertising Format | Eddystone (URL/ UID/ TLM), iBeacon, AltBeacon |
| Configuring Method | GBeacon SDK compiled app (e.g. GBeacon app) |
| Advertising Interval | Default 1300 ms, range from 100 ms to 10000 ms |
| Security | Access password required, Default Pin Code 000000 |
| Max Number of Broadcast | 10 Slots configurable advertising frames |
| Default Broadcast Interval | 1300 ms for iBeacon & Eddystone |
| System Compatibility | iOS 7.0+, Android 4.3+ |
| Advertising Distance | Up to 400m (Tx Power = 2.5 dBm, in open area) |
| Firmware Upgrading | OTA (upgrade firmware over the air) |
| Button | Power ON/OFF |
| LED | Status |

4. Product Specifications

| Item | Description |
|--|---|
| Chipset | DA14531 |
| Bluetooth Version | Bluetooth 5.1 |
| TX power | -19.5 dBm to +2.5 dBm |
| Antenna | F-shape PCB antenna |
| Power Supply | 2 * AAA (LR03), battery is included in the package |
| Power On | Long press central area for power on / off |
| Battery Life | Up to 10 Years (ADV Interval = 1300 ms; TX Power = 0 dBm, Battery Capacity=1000mAh) |
| Material | ABS plastic |
| Color | White or customized |
| Size | 55.7mm(L)*55.7mm(W)*16mm(H) |
| Net weight | 28g (Without battery) |
| Operating temperature | -20°C to +60°C |
| * All battery information depends on the usage environment and many other factors, actual results may vary. The battery validity period is usually 10 years. | |

5. Power consumption

| Advertising Interval (ms) | Power | Tx Power (dBm) | -19.5 | -7 | -3.5 | 0 | 2.5 |
|---------------------------|-------|----------------|---------|---------|---------|---------|---------|
| 100 | | | 44.62uA | 55.67uA | 63.98uA | 76.62uA | 89.60uA |
| 150 | | | 30.47uA | 38.50uA | 46.15uA | 53.72uA | 65.20uA |
| 200 | | | 25.35uA | 28.18uA | 38.62uA | 42.35uA | 47.83uA |
| 300 | | | 15.85uA | 20.20uA | 25.36uA | 26.68uA | 32.30uA |
| 400 | | | 13.42uA | 15.46uA | 19.35uA | 20.98uA | 25.35uA |
| 550 | | | 10.85uA | 12.28uA | 15.32uA | 16.85uA | 18.56uA |
| 750 | | | 8.08uA | 9.40uA | 12.08uA | 12.47uA | 14.00uA |
| 850 | | | 7.40uA | 8.52uA | 11.03uA | 11.22uA | 12.79uA |


| | | | | | |
|--------------|--------|--------|--------|--------|---------|
| 1000 | 6.73uA | 7.82uA | 9.07uA | 9.96uA | 10.76uA |
| 1300 | 5.53uA | 6.32uA | 7.93uA | 8.45uA | 9.38uA |
| 2000 | 4.18uA | 4.83uA | 5.82uA | 5.95uA | 6.86uA |
| 3000 | 3.33uA | 4.05uA | 4.42uA | 4.53uA | 5.02uA |
| 4000 | 3.12uA | 3.45uA | 3.72uA | 4.22uA | 4.35uA |
| 5000 | 2.93uA | 3.12uA | 3.34uA | 3.66uA | 3.86uA |
| 6000 | 2.70uA | 3.05uA | 3.16uA | 3.35uA | 3.74uA |
| 7000 | 2.66uA | 2.80uA | 2.93uA | 3.20uA | 3.42uA |
| 10000 | 2.43uA | 2.52uA | 2.70uA | 2.78uA | 3.02uA |

6. Configurable Parameters

Parameters in the below table are configurable by GBeacon SDK compiled app (e.g. GBeacon app), feel free to download GBeacon app from Google Play App Store or iOS App Store.

| Parameter | Description | |
|----------------------|---|--|
| Device Name | UTF-8 string, Default: GB2111-XXXXXX | |
| Pin Code | Access password to GB2111 Default: 000000, Range: 000000 ~ 999999 | |
| Advertising Interval | Default: 1300 ms, Range: 100 ~ 10000 ms | |
| Tx Power | Maximum Tx power: +2.5 dBm Default: 0 dBm, Range: -19.5 ~ +2.5 dBm | |
| Eddystone-URL | URL | URL that needed to be advertising |
| | RSSI at 0m | A 1-byte value representing the average received signal strength at 0m from the advertiser (GB2111), range: 0 ~ -127 |
| Eddystone-UID | Namespace | 10-byte Namespace |
| | Instance | 6-byte Instance |
| | Reserved | Reserved for future use |
| | RSSI at 0m | A 1-byte value representing the average received signal strength at 0m from the advertiser (GB2111), range: 0 ~ -127 |
| iBeacon | UUID | 16-byte UUID, e.g. FDA50693A4E24FB1AFCFC6EB07647825 |
| | Major | 2-byte Major, range: 0 ~ 65535 |
| | Minor | 2-byte Minor, range: 0 ~ 65535 |
| | RSSI at 1m | A 1-byte value representing the average received signal strength at 1m from the advertiser (GB2111), range: 0 ~ -127 |
| AltBeacon | ID1 | Beacon Identifier 1 |
| | ID2 | Beacon Identifier 2 |
| | ID3 | Beacon Identifier 3 |
| | RSSI at 1m | A 1-byte value representing the average received signal strength at 1m from the advertiser (GB2111), range: 0 ~ -127 |
| | Manufacturer ID | The beacon device manufacturer's company identifier code |
| | Manufacturer Reserved | Reserved for use by the manufacturer to implement special features |

7. Dimensions

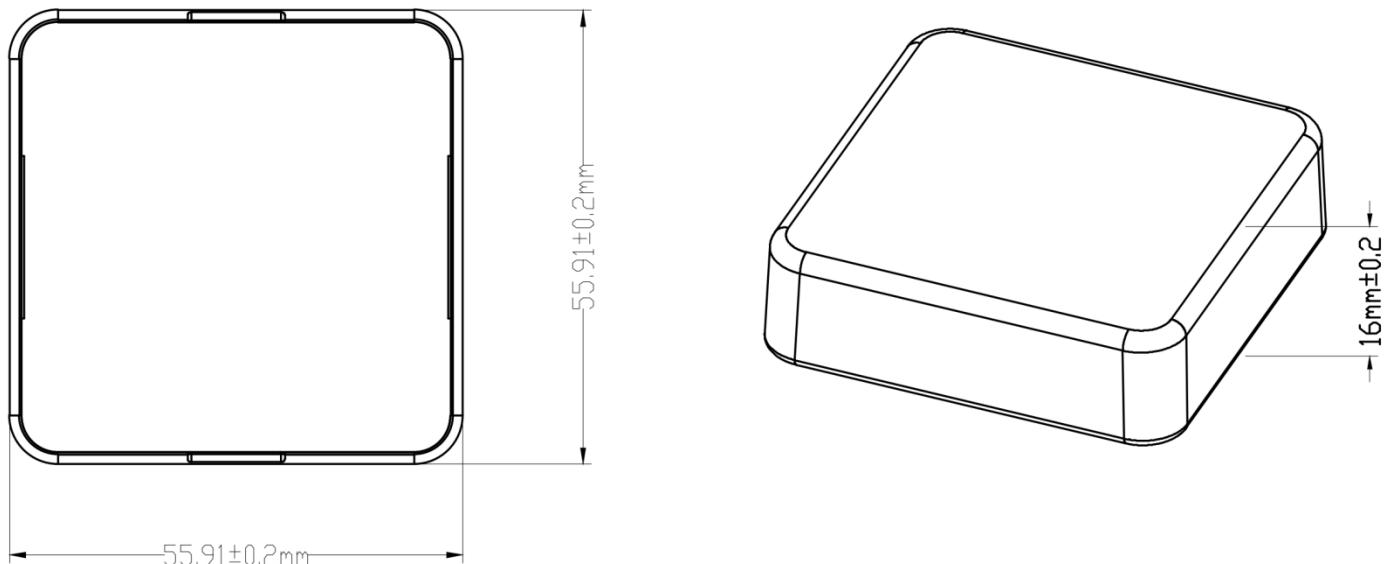

9. Declaration

The contents of this datasheet are subject to change without prior notice for further improvement. Glowbird team reserves all the rights for the final explanation.

iBeacon is a trademark of Apple Inc., Eddystone is a trademark of Google Inc.

Please contact Glowbird sales team or visit <https://www.glowbird.com/> to get more related information if needed.

10. Contact Information

Shenzhen Glowbird Technology Co.,LTD

Address: Rm 2004-2005, 20F, Huichao Technology Bldg, Jinhai Rd, Xixiang, Baoan Dist, Shenzhen, 518100, China.

Telephone: 86-755-23062695

Support: support@glowbird.com

Sales Service: sales@glowbird.com

11. Revision History

| Version | Changes | Author |
|---------|-----------------|--------|
| 1.0 | Initial Release | Marsh |